




































## WYMIARY AKUMULATORÓW

## AKUMULATORY TRADYCYJNE

Typ akumulatora	Napięcie (V)	Pojemność (Ah)	Wymiary			Sposób montażu	Waga z płynem (Kg)	Ilość kwasu (Litr)	Prąd ładowania (A)	Rodzaj klem (patrz dalej)
			Długość	Szerokość	Wysokość					
6N4-2A-4	6	4,0	71	71	96		0.90	0.20	0.40	J
6N4-2A-7	6	4,0	71	71	96		0.90	0.20	0.40	J
6N4A-4D	6	4,0	58	62	131		1.00	0.20	0.40	K
6N4B-2A	6	4,0	103	48	96		1.00	0.20	0.40	N
6N4B-2A-3	6	4,0	103	48	96		1.00	0.20	0.40	N
6N6-3B-1	6	6,0	99	57	121		1.30	0.30	0.60	G
B38-6A	6	12,0	119	83	161		2.80	0.70	1.40	G
12N5-3B	12	5,0	121	61	131		2.00	0.40	0.50	G
12N5,5-3B	12	5,5	138	61	131		2.40	0.42	0.60	G
12N5,5-4A	12	5,5	138	61	131		2.40	0.42	0.60	C
12N5,5-4B	12	5,5	138	61	131		2.40	0.42	0.60	G
12N7-3B	12	7,0	137	76	134		3.00	0.48	0.70	G
12N7-4A	12	7,0	137	76	134		3.00	0.48	0.70	G
12N7D-3B	12	7,0	137	76	150		3.00	0.60	0.70	G
12N9-3A	12	9,0	137	76	140		3.20	0.60	0.90	H
12N9-3B	12	9,0	137	76	140		3.20	0.60	0.90	G
12N9-4B-1	12	9,0	137	76	140		3.20	0.60	0.90	G
12N12A-4A-1	12	12,0	135	81	161		4.20	0.72	1.20	B
12N14-3A	12	14,0	135	90	167		4.90	0.80	1.40	I
12Y16A-3B	12	19,0	186	81	170		4.60	0.96	1.60	D
12N24-3	12	24,0	186	125	176		7.90	1.80	2.40	D
YB2,5L-C	12	2,5	81	71	106		1.00	0.24	0.25	N
YB3L-A	12	3,0	99	57	111		1.30	0.24	0.30	G
YB3L-B	12	3,0	99	57	111		1.30	0.24	0.30	G
YB4L-A	12	4,0	121	71	93		1.50	0.30	0.40	F
YB4L-B	12	4,0	121	71	93		1.50	0.30	0.40	F
YB5L-B	12	5,0	121	61	131		2.00	0.40	0.50	G
YB7-A	12	8,0	137	76	134		2.90	0.60	0.80	G
YB7A-A	12	8,0	137	76	148		2.90	0.60	0.80	G
YB7B-B	12	8,0	150	60	130		2.90	0.60	0.80	G
YB7C-A	12	8,0	130	90	114		3.00	0.50	0.80	D
YB7L-A	12	8,0	137	76	134		2.90	0.60	0.80	G
YB7L-B	12	8,0	137	76	134		2.90	0.60	0.80	G
YB7L-B2	12	8,0	136	76	131		2.10	0.70	0.90	G
YB9A-A	12	9,0	137	76	154		3.10	0.60	0.90	G

## AKUMULATORY TRADYCYJNE

Typ akumulatora	Napięcie (V)	Pojemność (Ah)	Wymiary			Sposób montażu	Waga z płynem (Kg)	Ilość kwasu (Litr)	Prąd ładowania (A)	Rodzaj klem (patrz dalej)
			Długość	Szerokość	Wysokość					
YB9B	12	9,0	137	76	140		3.10	0.60	0.90	G
YB9L-A2	12	9,0	137	76	140		3.10	0.60	0.90	C
YB9L-B	12	9,0	137	76	140		3.10	0.60	0.90	G
YB10A-A2	12	11,0	136	91	156		4.40	0.70	1.00	I
YB10L-A2	12	11,0	136	91	146		4.40	0.70	1.10	I
YB10L-B	12	11,0	136	91	146		4.40	0.70	1.10	G
YB10L-B2	12	11,0	136	91	146		4.40	0.70	1.10	I
YB12A-A	12	12,0	135	81	161		4.10	0.70	1.20	B
YB12A-B	12	12,0	135	81	161		4.10	0.70	1.20	G
YB12A-B2	12	12,0	135	81	161		4.10	0.70	1.20	G
YB12AL-A	12	12,0	135	81	161		4.10	0.70	1.20	B
YB12AL-A2	12	12,0	135	81	161		4.10	0.70	1.20	I
YB12B-B2	12	12,0	161	91	132		4.40	0.70	1.20	I
YB12C-A	12	12,0	135	81	175		4.10	0.70	1.20	F
YB14-A2	12	14,0	135	91	167		4.50	0.80	1.40	I
YB14-B2	12	14,0	135	91	167		4.50	0.80	1.40	I
YB14A-A1	12	14,0	135	91	176		4.50	0.80	1.40	G
YB14A-A2	12	14,0	135	91	176		4.50	0.80	1.40	I
YB14L-A1	12	14,0	135	91	167		4.50	0.80	1.40	A
SYB14L-A2	12	14,0	135	91	167		4.50	0.90	1.40	I
SYB14L-B2	12	14,0	135	91	167		4.50	0.80	1.40	I
YB14L-A2	12	14,0	135	91	167		4.50	0.90	1.40	I
YB14L-B2	12	14,0	135	91	167		4.50	0.80	1.40	I
YB16AL-A2	12	16,0	205	71	164		5.20	1.00	1.60	C
YB16B-A1	12	16,0	162	92	162		5.60	1.30	1.60	H
HYB16A-A	12	16,0	151	91	182		7.20	1.10	1.60	H
YB16BA	12	16,0	162	92	162		5.60	1.30	1.60	F
YB18A	12	18,0	182	92	164		5.70	1.20	1.80	H
YB18L-A	12	18,0	182	92	164		5.70	1.20	1.80	H
YB16L-A	12	19,0	182	82	164		6.30	1.20	1.90	H
YB16L-A2	12	19,0	175	100	155		4.75	1.25	1.90	H
YB16B	12	19,0	176	101	156		6.30	1.20	1.90	G
YB16CL-B	12	19,0	175	100	175		6.30	1.30	1.90	F
YB16L-B	12	19,0	176	101	156		6.30	1.20	1.90	B
SYB50-N18L-A2	12	20,0	206	91	164		7.50	1.50	2.00	H
SYB50-N18L-AT	12	20,0	206	91	164		7.50	1.50	2.00	F
Y50-N18A-A	12	20,0	206	91	177		7.50	1.50	2.00	H
Y50-N18L-A2	12	20,0	206	91	164		7.50	1.50	2.00	H
Y50-N18L-A3	12	20,0	206	91	164		7.50	1.50	2.00	F
Y60-N24L-A2	12	24,0	185	125	176		8.60	1.70	2.80	D

## AKUMULATORY TRADYCYJNE

Typ akumulatora	Napięcie (V)	Pojemność (Ah)	Wymiary			Sposób montażu	Waga z płynem (Kg)	Ilość kwasu (Litr)	Prąd ładowania (A)	Rodzaj klem (patrz dalej)
			Długość	Szerokość	Wysokość					
Y60-N24A-LB	12	24,0	185	125	176		8.60	1.70	2.80	D
Y60-N24L-A	12	24,0	185	125	176		8.60	1.70	2.80	D
YB30L-B	12	30,0	168	132	176		8.60	2.00	3.00	F
Y60-N30L-A	12	30,0	187	130	170		8.60	1.70	3.00	D
Y60N-30L-B	12	30,0	187	130	170		8.60	1.70	3.00	D
YB16HL-A-CX	12	19,0	176	101	156		6,30	1,20	1,90	G



## AKUMULATORY BEZOBSŁUGOWE FABRYCZNIE ZAŁANE

Typ akumulatora	Napięcie (V)	Pojemność (Ah)	Wymiary			Sposób montażu	Waga z płynem (Kg)	Ilość kwasu (Litr)	Prąd ładowania (A)	Rodzaj klem (patrz dalej)
			Długość	Szerokość	Wysokość					
YT4B-5	12	2,5	112	38	85		1.00	-	0.30	F
YT7B-4	12	6,5	148	64	90		2.60	-	0.70	F
YT9B-4	12	8,0	150	69	105		3.00	-	0.80	F
YT10B-4	12	10,0	150	88	95		3.80	-	0.90	F
YT12B-4	12	11,0	151	70	130		4.10	-	1.10	F
YT14B-4	12	12,0	150	69	145		4.26	-	1.20	F
SLA 12-4	12	4,0	112	70	85		1.60	-	0.40	F
SLA 12-5	12	5,0	112	70	102		2.00	-	0.50	F
SLA 12-6	12	6,0	150	80	95		2.50	-	0.60	F
SLA 12-8	12	8,0	150	80	106		2.80	-	0.80	F
SLA 12-10	12	10,0	152	88	131		3.90	-	1.00	F
SLA 12-12	12	12,0	152	88	147		4.20	-	1.20	F
SLA 12-18	12	18,0	180	75	165		6.10	-	1.80	D
SLA 12-22	12	22,0	180	75	165		6.10	-	2.20	D
SLA 12-24	12	24,0	195	127	180		10.00	-	2.40	D
SLA 12-32	12	32,0	195	127	180		11.00	-	3.20	B
YTZ7-S	12	6,0	112	69	103		2.10	-	0.60	F
YTZ10-S	12	8,6	150	86	95		3.20	-	0.90	F
YTZ12-S	12	11,0	150	86	110		3.70	-	1.10	F
YTZ14-S	12	12,0	150	86	110		3.90	-	1.10	F
YB5L-B (S)	12	5,0	120	61	132		2.00	-	0.60	F
YB14L-A2 (S)	12	14,0	135	91	167		4.50	-	1.40	I
YB14L-B (S)	12	14,0	135	90	161		4.65	-	1.40	I
YB16B (S)	12	16,0	176	101	156		6.30	-	1.90	G
YB16L-B (S)	12	19,0	176	101	156		6.30	-	1.90	F
YB16CL-B (S)	12	19,0	175	100	175		8.60	-	1.90	F

## AKUMULATORY BEZOBSŁUGOWE Z OSOBNYM ELEKTROLITEM

Typ akumulatora	Napięcie (V)	Pojemność (Ah)	Wymiary			Sposób montażu	Waga z płynem (Kg)	Ilość kwasu (Litr)	Prąd ładowania (A)	Rodzaj klem (patrz dalej)
			Długość	Szerokość	Wysokość					
YT4B-BS	12	2,3	113	39	85		0.83	0.12	0.20	O
YTR4A-BS	12	2,3	113	49	85		1.00	0.14	0.20	O
YT4L-BS	12	3,0	114	71	86		1.50	0.19	0.30	I
YTX4L-BS	12	3,0	114	71	86		1.50	0.20	0.30	F
YT5L-BS	12	4,0	114	71	106		1.90	0.25	0.40	F
YTX5L-BS	12	4,0	114	71	106		1.90	0.25	0.40	F
YT7B-BS	12	6,5	150	65	93		2.30	0.30	0.65	F
YTX7A-BS	12	6,0	152	88	94		2.40	0.38	0.60	F
YTX7L-BS	12	6,0	144	71	131		2.50	0.33	0.60	F
YTZ7S-BS	12	6,0	113	70	105		2.10	0.20	0.60	F
YT9B-BS	12	8,0	150	70	105		3.40	0.60	0.80	F
YTX9-BS	12	8,0	152	88	106		3.20	0.45	0.80	F
YT9L-BS	12	8,0	152	88	106		3.20	0.45	0.80	F
YTZ10S-BS	12	8,5	151	87	94		2.60	0.60	0.80	F
YTX9A-BS	12	9,0	135	76	137		3.20	0.50	0.90	G
YTX12A-BS	12	10,0	150	87	130		3.50	0.60	1.00	F
YTX12-BS	12	10,0	152	88	131		4.00	0.60	1.00	F
YTX12L-BS	12	10,0	152	88	131		4.00	0.60	1.00	F
YT12B-BS	12	11,0	151	70	130		4.10	0.60	1.10	F
YT12A-BS	12	11,0	152	88	106		3.60	0.50	1.10	F
YTZ12S-BS	12	11,0	150	87	110		3.10	0.50	1.10	F
YT14B-BS	12	12,0	150	69	145		3.42	0.84	1.20	F
YTX14-BS	12	12,0	152	88	147		4.50	0.69	1.20	F
YTX14AH-BS	12	12,0	134	89	166		4.95	0.66	1.20	F
YTX14AHL-BS	12	12,0	134	89	166		4.95	0.66	1.20	F
YTX14L-BS	12	12,0	152	88	147		4.50	0.69	1.20	F
YTZ14S-BS	12	12,0	150	87	110		3.00	0.69	1.10	F
YTX15L-BS	12	12,0	175	87	130		4.80	0.69	1.20	F
YTX16-BS	12	14,0	152	88	161		5.30	0.80	1.40	F
YTX16-BS-1	12	14,0	152	88	161		3.95	0.70	1.40	F
YTX16L-BS	12	14,0	151	87	158		3.95	0.70	1.40	F
YTX18L-BS	12	18,0	205	89	163		7.50	1.20	1.80	F
YTX20-BS	12	18,0	175	86	154		5.70	0.90	1.80	F
YTX20H-BS	12	18,0	175	87	155		6.84	0.93	1.80	F
YTX20HL-BS	12	18,0	175	87	155		6.84	0.93	1.80	F
YTX20L-BS	12	18,0	175	86	154		5.70	0.90	1.80	F
YTX24HL-BS	12	24,0	205	87	162		7.83	0.99	2.40	F

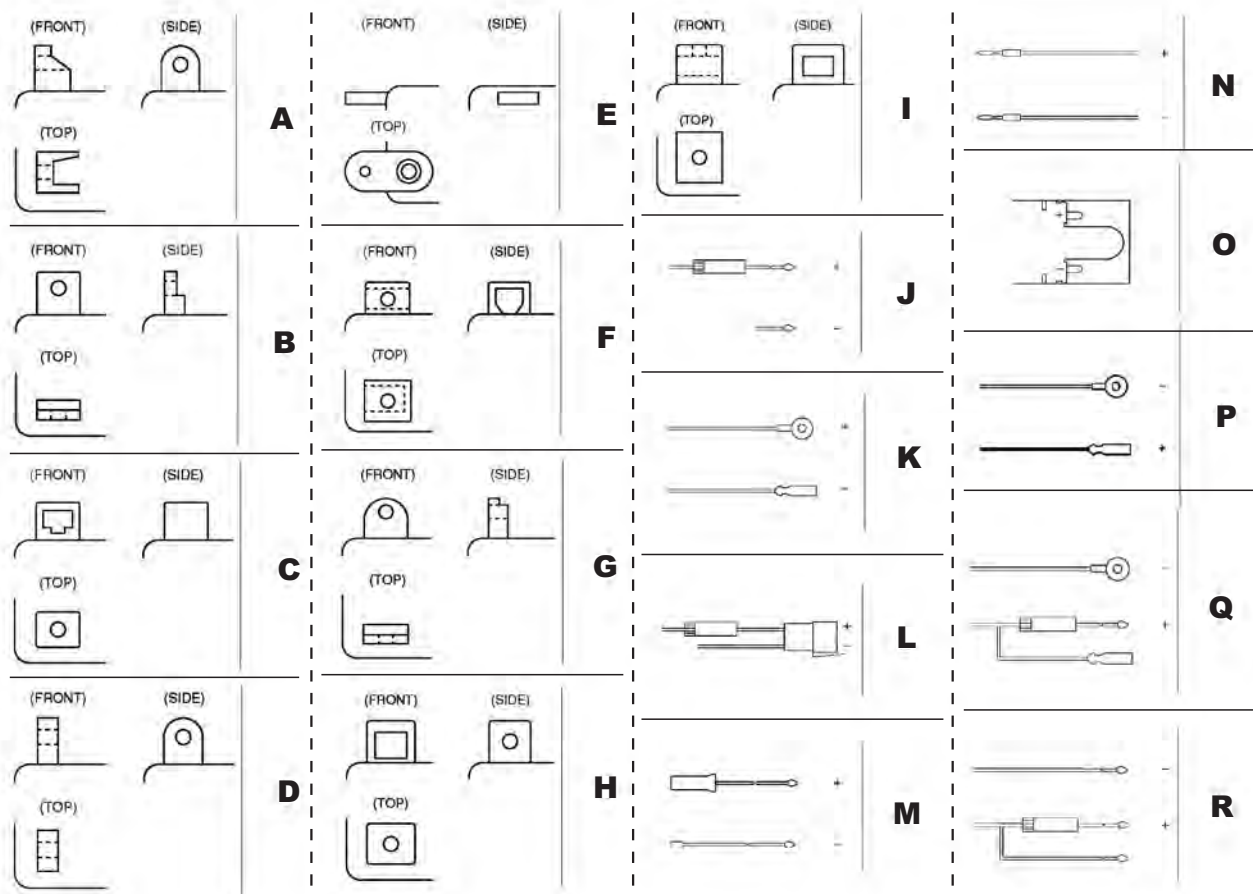
WYMIARY AKUMULATORÓW



## AKUMULATORY ŻELOWE

Typ akumulatora	Napięcie (V)	Pojemność (Ah)	Wymiary			Sposób montażu	Waga z płynem (Kg)	Ilość kwasu (Litri)	Prąd ładowania (A)	Rodzaj klem (patrz dalej)
			Długość	Szerokość	Wysokość					
GB9-B	12	9,0	137	76	140		3.70	0.95	0.9	G
GB10L-A2	12	10,0	136	91	146		4.00	1.00	1.0	I
GB12A-A	12	12,0	134	80	161		4.40	1.20	1.2	B
GB14L-A2	12	14,0	135	91	167		4.40	1.30	1.4	B
G50N18LA2	12	20,0	206	91	164		7.20	2.00	2.0	H
G60-N30L-A	12	30,0	168	130	170		9.50	3.00	3.0	D
GTX4L-BS	12	3,8	114	71	86		1.70	0.40	0.4	I
G12-4	12	4,0	114	71	86		1.80	0.40	0.4	F
GTX5L-BS	12	5,0	114	71	106		2.15	0.50	0.5	F
GTZ7-S	12	6,0	112	69	103		2.30	0.60	0.6	F
GTX7A-BS	12	6,0	152	88	94		2.90	0.70	0.6	F
GTX7L-BS	12	6,0	144	71	131		2.65	0.70	0.6	F
GT7B-4	12	8,0	148	64	90		2.40	0.60	0.8	F
GT9B-4	12	8,0	150	69	105		2.95	0.80	0.8	F
GTX9-BS	12	8,0	152	88	106		3.50	0.90	0.8	F
GTZ10-S	12	8,6	150	86	95		3.30	0.85	0.86	F
GTX12-BS	12	10,0	152	88	131		4.40	1.20	1.0	F
GTZ12-S	12	11,0	150	86	110		3.95	1.10	1.1	F
GT12B-4	12	11,0	151	70	130		3.70	1.05	1.1	F
GT14B-4	12	12,0	150	69	145		4.30	1.25	1.2	F
GTX14-BS	12	12,0	152	88	147		5.00	1.40	1.2	F
GTX20-BS	12	18,0	175	86	154		6.60	2.00	1.8	F
GTX20L-BS	12	18,0	175	86	154		6.60	2.00	1.8	F
G12-19	12	19,0	182	82	170		6.70	1.90	1.9	D

## AKUMULATORY - RODZAJE KLEM



WYMIARY AKUMULATORÓW